

隧道燈

IRIS Fluro

TN05

全功能耐候隧道燈，一體成型式鋁擠型外殼，配合各種隧道階段所需不同光學設計，提供設計及功能兼具的燈具選擇。


The full-featured weather-resistant tunnel light, made of one piece extruded aluminium housing, and matches the different optical designs required by various tunnel stages.



Website





- 外罩 | 鋁擠型 **Cover** | Aluminium extrusion
- 面框 | 鋁擠型 **Frame** | Aluminium extrusion
- 燈罩 | 強化玻璃 **Lamp cover** | Tempered glass
- 反射板 | 鋁材 **Reflector** | Aluminium
- 防撞等級 | IK08 **Protection class** | IK08
- 防護等級 | IP65 **Protection class** | IP65

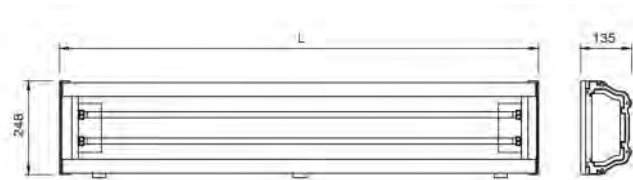

Unit : mm



光源 Light source	瓦數 Wattage	額定電壓 Voltage	色溫 CCT	發光效率 Voltage	配光 Light distribution
T5	L 1320mm (28W / 28W*2)	AC220V 60HZ	3000K / 4000K / 6500K	≥ 85 Lm / W	對稱型 Symmetrical
T8 LED	L 1320mm (18W / 18W*2)		4000K / 5000K	≥ 90 Lm / W	



— 00 / 180 PLANE — 90 / 270 PLANE